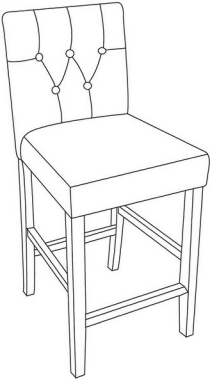













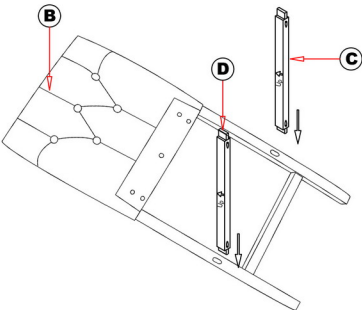

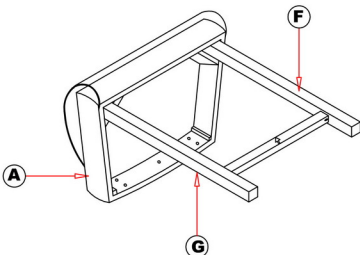
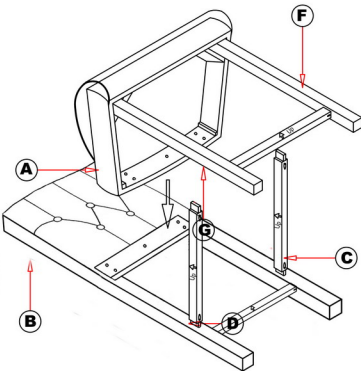





Assembly Instruction	Parts List			
	Parts ID	Image	Description	Qty
 <p>1. When assembling, two or more adults are required.  2. DO NOT TIGHTEN ANY SINGLE BOLTS OR NUTS BEFORE ALL BOLTS &amp; NUTS IN THE ASSEMBLED POSITION.  3. Please check bolts regularly and tighten if needed.  4. Spot Clean by soft damp cloth.  5. Keep this Manual for future reference.</p>	A		Chair Cushion	1
	B		Chair Backrest	1
	C		Side cross bar (Left)	1
	D		Side cross bar (Right)	1
	E		Front cross bar	1
	F		Front Leg (Left)	1
	G		Front Leg (Right)	1
	Hardware Parts			
	1		M8x60mm	4
	2		Screw 4.2x35mm	6
	3		Washers	9
	4		Spring Washer	9
	5		Allen key	1
	6		M8x50mm	5

Step1	Step2	Step3
 <p><b>Insert the cross bars C/D onto the backrest B.</b></p>	 <p><b>Insert the cross bar E onto the front legs F/G.</b></p>	 <p><b>Put front legs F/G onto seat A.</b></p>

Step4	Step5	Step6
 <p>Put the seat A and front legs F/G onto the leaning back B and side cross bar C/D,press the end of the side cross bar C/D into the front legs F/G and make sure the hole on seat A align with the hole of leaning back B.</p>	 <p>Tighten the front legs F/G to the seat A with bolts 1, spring washers 3 &amp; 4 using Allen Key 5, then attached the seat A to leaning back B with bolts 7, spring washers 3 &amp; 4 using Allen Key 5.</p> <p>Do not fully tighten front legs F/G to the seat A in this assembly step.</p>	 <p>Tighten the side cross bar C/D to the leaning back B and the front legs F/G with screws 2 using screw driver.</p> <p>Tighten the front cross bar E to the front legs F/G with screws 2 using screw driver.</p> <p>Then fully tighen the front legs on the step 5.</p> <div> <div>Finish</div>  </div>